

HOW TO GUIDE

Step: 1

Example A

Prepare area to be patched by clean cutting damaged area.

Example B

Use spray cleaner on the surface to be patched.

Example C

Clean thoroughly with paper towels/rags to remove all dirt, grease, debris to achieve maximum patch hold.

Example D

Allow to dry completely before applying patch.



Example A

Example B

Example C

Example D


Step: 2

Example E

Cut desired amount of PETACKS patch material to be used.

Example F

Round off corners of PETACKS patch material for maximum hold.

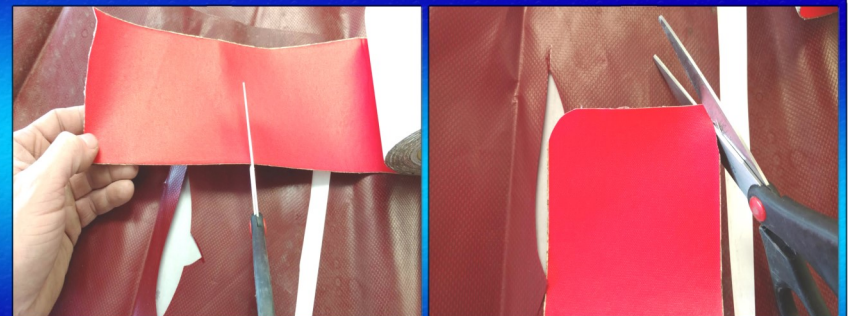

Example E

Example F

Step: 3

Example G

Peel backing away from the PETACKS patch material and apply it to the fabric evenly by hand as not to allow any air pockets or folds in the material.

Example H

Use of a fabric roller or flatten the PETACKS patch material by hand to remove any wrinkles.

(Optional)

Gentle Use of a Heat Gun or blow dryer over the PETACKS patch material can aid in increasing bond strength and flattening of material preventing edges from fraying.



Example G

Example H

Step: 4

Example J & K

For maximum patch efficiency, if possible add a patch to the opposite side of the tarp you previously patched by restarting at Step:1. This will increase the strength of the PETACKS patch material and prevent any future tears.

When both PETACKS patch's are complete your tarp is repaired and ready to use immediately.



Example J

Example K